



 Latest updates: <https://dl.acm.org/doi/10.1145/3663548.3675646>

RESEARCH-ARTICLE

Characterizing "Motor Ability" for Ability-Based Design

CLAIRE L MITCHELL, University of Washington, Seattle, WA, United States

JACOB O. WOBROCK, University of Washington, Seattle, WA, United States

Open Access Support provided by:

University of Washington



PDF Download
3663548.3675646.pdf
29 January 2024
Total Citations: 1
Total Downloads: 842

Published: 27 October 2024

[Citation in BibTeX format](#)

ASSETS '24: The 26th International ACM SIGACCESS Conference on Computers and Accessibility
October 27 - 30, 2024
NL, St. John's, Canada

Conference Sponsors:
SIGACCESS

Characterizing “Motor Ability” for Ability-Based Design

Claire L. Mitchell

The Information School | DUB Group
University of Washington
Seattle, WA, USA
clairelm@uw.edu

Jacob O. Wobbrock

The Information School | DUB Group
University of Washington
Seattle, WA, USA
wobbrock@uw.edu

Abstract

Ability-based design (Wobbrock et al. 2011, 2018) offers conceptual guidance for its use in designing accessible systems, but the construct of “ability” itself—a crucial notion for ability-based design—is surprisingly elusive and absent from extant accounts. Different disciplines offer disparate notions regarding definitions and measures of “ability,” but ability-based design has yet to avail itself of these notions in its operationalization. To address this gap, this work reviews literature that quantifies motor abilities, provides guidance to distill metrics for human-computer interaction, and conceptualizes how motor ability should be quantified for ability-based design. We offer a three-dimensional framework composed of the user, context, and task, and we locate various metrics for ability to be used when implementing ability-based designs. We support this new conceptualization with example personas that occupy this three-dimensional space. This work can inform those using ability-based design to create systems that are responsive to users’ abilities.

CCS Concepts

- Human-centered computing → Accessibility theory, concepts and paradigms; User models.

Keywords

accessibility, ability, human motor control, ability-based design

ACM Reference Format:

Claire L. Mitchell and Jacob O. Wobbrock. 2024. Characterizing “Motor Ability” for Ability-Based Design. In *The 26th International ACM SIGACCESS Conference on Computers and Accessibility (ASSETS ’24), October 27–30, 2024, St. John’s, NL, Canada*. ACM, New York, NY, USA, 15 pages. <https://doi.org/10.1145/3663548.3675646>

1 Introduction

“Ability” is a core, but often *implied*, concept in human-computer interaction (HCI) and accessibility; for example, speech-language pathologists work with patients to assign augmentative and alternative communication (AAC) technologies based on patients’ abilities [19], usability professionals study how fast and effectively users are able to navigate through websites [11], and researchers measure text entry efficiency when evaluating new input devices [135].



This work is licensed under a Creative Commons Attribution International 4.0 License.

ASSETS ’24, October 27–30, 2024, St. John’s, NL, Canada

© 2024 Copyright held by the owner/author(s).

ACM ISBN 979-8-4007-0677-6/24/10

<https://doi.org/10.1145/3663548.3675646>

These engagements with “ability” in HCI and accessibility are often unidirectional in the sense that information is obtained about the design of systems based on their usage, but systems come to learn nothing of their users’ abilities and have no capacity for representing those abilities even if they did [124, 125]. By contrast, some authors have envisioned a more bidirectional user-system relationship, where a user acts on a system through their abilities, and the system responds to the user accordingly. For example, Gajos et al. [25–27] showed how desktop user interfaces could be automatically generated in response to a user’s observed abilities as demonstrated in a testbed. Evenson et al. [18] described systems designed to respond to users’ latent abilities as they arise in dynamic worlds. Wobbrock et al. [124, 125] articulated a vision of *ability-based design*, where systems model and respond to a user’s situated abilities. However, even Wobbrock et al.’s articulation of ability-based design stops short of conceptualizing what “ability” actually means.

Ability-based design [124, 125] is now over a dozen years old, and has highlighted the importance of developing computing systems that are responsive to users’ abilities. Numerous researchers and designers have engaged with the concept, including for young adults with intellectual disabilities [7, 8], psychomotor and cognitive user modeling for wheelchair users [40–42], smartphone interactions for older adults [90–92], children with motor disabilities [110], improving pointing techniques in graphical user interfaces [120], and for designing accessible outdoor activities [2]. It has even inspired Android applications capable of detecting certain abilities and recommending suitable assistive technologies [118]. But despite its uptake, ability-based design has never satisfactorily articulated “ability.” For a concept so central to this design perspective to have remained unexamined is concerning; we therefore aim to address that omission in this work.

Most manifestations of ability-based design take piecemeal and *ad hoc* approaches to considering or modeling ability, approaches that are narrowly in service of the creation of a specific product but that lack any deep engagement with ability itself (e.g., [25, 70, 71, 91]). These disparate manifestations reflect the limited understanding of how to utilize models of ability *beyond* HCI that clinicians and researchers in other fields have developed. As interactive technologies become increasingly informed by and deployed in other fields’ settings (e.g., medicine, therapy, social science, sports), understanding “ability” through these models as whole-body, socioeconomic, situational, and environmental phenomena becomes increasingly important. Thus, to further ability-based design, a deeper consideration of ability must be made, one that enables new approaches to conceptualizing, measuring, or modeling ability as

translatable across devices, interfaces, contexts, and activities, allowing for “ability” to be usefully reified by interactive computing systems.

In this work, we move from implicit notions of ability to concrete notions of ability in order to solidify this construct for ability-based design. We focus on motor ability to demonstrate this move to concrete notions of ability—using metrics that characterize motor ability and relating these metrics, and “ability” more generally, to conceptual user models [74]. In so doing, we argue that for a system to robustly consider ability, it must: (1) consider metrics for ability within and beyond the field of HCI; (2) consider inputs that arise from a variety of data-capture methodologies and sources; and (3) consider how metrics complement and attenuate each other. This work highlights the multifaceted nature of motor ability, and ability more broadly, through the synthesis of multiple definitions and metrics for these concepts across fields.

2 Related Work

In this section, we review the research efforts that are similar to ours, namely that have attempted to clarify the notion of “ability” in some respect. As there have been relatively few such efforts and many of these efforts used constrained definitions of ability, this section focuses only on salient examples; however, the rest of this paper is devoted to reviewing, organizing, and synthesizing how other prior work, especially in disparate fields, has shed light on “ability.”

Nolte et al. [74] described how considering the intertwining nature of users, tasks, and contexts is imperative when designing a system using ability-based design. They described a modification of conceptual user modeling that emphasizes the union of task, user, and context. While Nolte et al.’s framing builds upon ability-based design, it offers little information on how designers and researchers can define or measure “ability” itself for each of task, user, and context [73]. We build on Nolte et al.’s work by examining how task, user, and context can be solidified with a firmer notion of “ability” in hand.

Other work that touched upon a conception of “ability” was Vanderheiden’s vision for a Global Public Inclusive Infrastructure (GPII). This project, formulated independently of ability-based design but consistent with its goals [124], proposed an infrastructure that could enable ability-based design [112–117]. Specifically, the GPII aimed to facilitate researchers, clinicians, developers, families and others the ability to customize information and communication technologies to their personal needs, aligning with ability-based design’s goals of creating accessible technology by placing the burden of adaptation on the technology, not the user. The GPII’s authors outlined a specific example implementation, the Library GPII System, which infuses the information and communication technology resources that libraries provide with the infrastructure enabled by the GPII, to create more inclusive libraries that facilitate access to information for everyone [113]. Recently, the team has created and tested an implementation of the GPII called *Morphic*, which eases access to a computer’s accessibility features through a large button strip as well as a system that saves users preferences for persistence across devices [111]. However, *Morphic* relies upon users to

specify their preferences for accessibility modifications, rather than automatically adjusting to observed or reported abilities.

Kondraske developed an early PC-based human performance measurement system [50, 51] that quantified a user’s motor control, coordination, stability, and range of motion, among other things. While this system looked to comprehensively measure human performance, its ability to translate its measurements on specific computer input tasks to a general notion of “ability” is limited.

Similarly, Koester et al. created a PC-based ability assessment system called *Compass* [47]. *Compass* had four components, including a client interface for ability assessment, a clinician interface for test configuration, a data visualization interface for viewing results, and a tele-rehabilitation interface for conducting remote assessments. *Compass* primarily covered keyboard, pointing device, and single-switch use. It was shown to be a valid and reliable means of assessing these computer input abilities [48, 49], but did not broaden beyond such abilities.

Building off this tradition of PC-based test beds, Gajos et al. devised the notion of an “ability-based user interface,” which could be automatically generated by their system, *SUPPLE* [24–26]. Gajos et al.’s test bed involved mouse clicking, pointing, movement, dragging, and list selection. These behaviors were captured with regression models and used by a decision-theoretic interface generation algorithm that could minimize the “cost” of operating a user interface, which was shown to be more successful for people with motor disabilities [27]. Along with a user’s motor abilities, *SUPPLE* could take into account a user’s preferences as well [24, 25].

Persad et al. described how to measure human capabilities to support inclusive design evaluations [80]. They provided guidelines for designers, describing sensory, cognitive, and motor capabilities, and their respective lower-level categories. Specifically, for motor control, they distinguished upper-limb capabilities and gross body-movement capabilities. This work was extended through a topological data analysis of these categories through 39 measures of ability [79]. This work also clustered individuals by varying capability types, thereby creating granular personas, but it offered a rather limited view of “ability,” not considering any environmental, contextual, situational, social, or other factors.

Reyes-Cruz et al. provided specific competencies that blind or low vision individuals develop to carry out various tasks [84]. Their work supports the claim that disability is largely structural, highlighting the unique routines and preferences individuals with disabilities must employ. They argue that these competencies should be considered “abilities” in any system that attempts to embrace ability-based design.

Similarly, Johnson et al. examined “capability” and how to measure it for the purpose of providing a database for inclusive design [44]. They compared measurement types, ultimately outlining the need for measurements that encompass activities, tasks, product interactions, and component functions, which are measurements that are not centered around specific activities.

These prior efforts somewhat conceptualize or operationalize “ability” in limited, implied ways, offering some guidance for how to incorporate measurements of ability in HCI. But none of them tackle “ability” head on. We follow Nolte et al.’s [74] integration of task, user, and context to develop a three-axis space in which measurements of ability can be placed.

3 Towards Characterizing “Ability”

“Ability” is a large and somewhat intractable concept. Therefore, in our efforts to carefully consider ability, we focus on motor ability, demonstrating that even a narrow aspect of ability can be exceedingly rich and nuanced. We approach this task by surveying metrics that have different data sources (e.g., observational vs. self-reported) as well as different data types (e.g., qualitative vs. quantitative). By reviewing a large number of metrics that attempt to capture some aspect of motor ability, we show that expanding beyond metrics used in human-computer interaction (HCI) to characterize “ability” provides a rich view; indeed, these metrics can be utilized in HCI as well.

We sourced classification schemes for “ability” from medicine, rehabilitation engineering, physical and occupational therapy, biomechanics, sports science, ergonomics, and HCI. To extract a fair and representative picture of ability across these fields, we identified relevant literature through multiple mechanisms: overall query searching, forwards and backwards snowballing, and field-specific query searching [127].

We utilized query searching of PubMed,¹ the ACM DL,² and IEEE Xplore³ to identify papers of interest. Our query had three categories, and within a category the “OR” condition was used, while between categories the “AND” condition was used. The first category utilized common keywords to describe disability;⁴ the second used keywords to describe classification schemes;⁵ the third used descriptors of motor abilities.⁶ The search was over paper titles and metadata. These initial queries primarily identified literature that utilized existing measures of ability within their own research, but also identified literature that developed measures of ability. In the former case, the original source for the metric cited within the queried literature was accessed.

Along with identifying literature, our search identified how abilities are measured in different fields. These results helped define additional field-specific queries. For example, rehabilitation medicine utilizes terms such as “upper arm rehabilitation measures” or “gross motor function measures.” From here, we employed multi-level snowballing and reverse snowballing [93] to identify seminal papers, specific ability models, critical analyses of such models, and insights into how such models could be employed in ability-based design. We also identified themes and metrics from the Shirley Ryan AbilityLab Rehabilitation Measures Database [1].

Our final identified body of literature was separated into three areas that arose from themes we identified in the literature: (1) measures characterizing body mechanics, (2) measures describing quality of life and activities of daily living, and (3) measures of technology proficiency and use, which were largely from HCI. The literature from outside HCI, mostly in (1) and (2), was separated by how ability is viewed irrespective of field, as there is considerable overlap between fields for many of the metrics in how they are employed. This separation also highlights the two ends of a

spectrum along which many fields view the body’s ability. Further, this separation also facilitates general translation to HCI, and helps to understand which measures could inform, or be adapted to, ability-based design. The following described measures are a representative sample of the measures identified in the literature. These measures were chosen to represent the range and diversity that motor ability occupies, the types of measurements available, and the prominence and acceptability of use.

3.1 Body Mechanics as “Ability”

Characterizing body mechanics is a fundamental method of measuring ability and is a common tool used to diagnose and track ability changes in fields such as medicine and rehabilitation [5]. Body mechanics can represent ability in multiple ways: directly as they are measured, indirectly as they are extrapolated to bodily function, or somewhere in between. In this subsection, we review the ways in which body mechanics can be used as measures of ability.

Body mechanics can be classified into descriptions of the positions of the body in static or dynamic conditions (kinematics), and the forces and moments that generate these positions (kinetics). Body position and movement are commonly measured through goniometers, motion capture, and inertial measurement units (IMUs). Body output forces and torques are measured through force plates, load cells, pressure sensors, and dynamometers. The generation of these forces and torques can be examined by proxy through tools that measure muscle activity, such as electromyography (EMG) [6].

The signals from these biomechanical sensors can be employed in computer systems to characterize motor control. For example, motion capture and other signals are employed in OpenSim and other musculoskeletal simulation tools to understand mechanisms of motor control [15, 97], or in the gait deviation index (GDI), an index of gait pathology for cerebral palsy [94]. One use of EMG is to calculate muscle synergies, or common motor modules of control [104], which can be used to calculate the dynamic motor control index during walking (Walk-DMC), a measurement that uses EMG to describe the variability of a user’s motor control while walking [103]. Indices such as the GDI or Walk-DMC can offer clinicians and researchers tools to understand the biomechanical impact of a disability as a numerical value.

These biomechanical signals can be used in two ways: (1) as *measures* of ability in assessments, or (2) as input to *control* computer systems [53, 89]. In the former case, biomechanical signals and the tools used to collect them are often utilized as measures to determine if someone falls with a “normal” range from a medical perspective. For example, using a system that tracks joint angles to identify range of motion is not clinically meaningful without a normative reference range for joint mobility. Such normative comparisons are considered necessary in medicine for diagnosis. For ability-based design, diagnosis or a comparison to “normal” is not the goal; thus, there is an expanded opportunity to use these metrics as purely observational values, ones to which computing systems might respond.

Clinicians often utilize physiological descriptors of how body mechanics might be altered or affected. These descriptors include topographic indicators, such as paraplegia or tetraplegia for cerebral

¹<https://pubmed.ncbi.nlm.nih.gov/>

²<https://dl.acm.org/>

³<https://ieeexplore.ieee.org/Xplore/home.jsp>

⁴Keywords for disability: disability, impairment, ability.

⁵Keywords for classification: model, classification, system, assessment, scale, level.

⁶Keywords for motor abilities: motor control, motor, strength, ambulation, coordination, mobility, range of motion.

palsy (CP), spinal cord injury (SCI), and stroke, among others [29, 69, 78].

Many measures of ability describe information about body mechanics from a functional, non-task-specific perspective. These measures include range of motion, dexterity, strength, coordination, balance, and sensory function. For example, hand-grip strength, measured as a maximum voluntary contraction, is a common metric for monitoring sarcopenia [65, 68, 86, 99]. The International Standards for Neurological Classification of Spinal Cord Injury (IS-NCSCI) by the American Spinal Cord Injury Association (ASIA) classifies SCI by the level of retained motor and sensory function after injury [87]. These levels are determined by examining sensation and muscle function within specific dermatomes and myotomes,⁷ respectively. This information is used for the ASIA impairment scale (AIS) [69], a five-point letter-grade scale based on the Frankel classification of spinal cord injury [22].

Another assessment of body mechanics is the Fugl-Meyer assessment, a standard measurement tool to monitor stroke recovery as well as multiple sclerosis or traumatic brain injury [82]. It is a 226-point scale, with its items separated into five areas: (1) motor function, separated by upper and lower extremities, (2) sensory function, (3) balance, (4) joint range of motion, and (5) joint pain. Each item on the assessment is graded on a 3-point ordinal scale where 0 = “cannot perform,” 1 = “performs partially,” and 2 = “performs fully” [23, 29]. Such metrics that describe functional, non-task-specific ability, could be leveraged in ability-based design as generalizable metrics that translate across multiple activities.

Paralympic classification provides a substantial set of guidelines for functional classification of a body’s abilities, as the aim is to minimize the disability’s effect on the competition’s fairness for the athletes [13]. Disability is separated into 10 types: muscle strength, range of movement, hypertonia, ataxia, athetosis, short stature, amputation, leg length difference, vision impairment, and intellectual impairment. Athlete assessments have evolved over time to use qualitative descriptions and quantitative ratio-based scales, and moving away from ordinal scales and ratings [107–109].

Other measures of ability in body mechanics include task-specific measures that are designed to be proxies of functional body mechanics. For example, the Box and Blocks test [66] and Nine Hole Peg Test [46, 67] capture hand and finger dexterity, respectively, through manual manipulation tasks. Similarly, the Action Research Arm Test (ARAT) describes grasp, grip, pinch, and gross movement [54, 131].

Furthermore, other metrics blend measures of body mechanics with bodily function during activities of daily living. For example, the Movement Disorder Society’s Unified Parkinson’s Disease Rating Scale (MDS-UPDRS) has four sections: non-motor aspects of experiences of daily living, motor aspects of experiences of daily living, a motor examination, and motor complications [33]. Further metrics that rely on activities of daily living alone are described in the next section.

In medicine, measures are commonly taken periodically to diagnose and assess changes in a person’s body mechanics and function. Given the various ways that body mechanics can be measured, from

⁷A dermatome is an area of the skin innervated by a segment of the spinal cord; a myotome is a group of muscles that are innervated by a segment of the spinal cord [69].

body-worn sensors to clinical assessments, and from a fine-to-gross motor control, these measures lend themselves well to assessing motor ability by observing a range of biomechanical activities.

Holistically, the biomechanical view of ability could be considered “how a body functions.” This locates ability directly in the body, and is less emphasizing of outcomes than ability-based design, which in its *ability* principle is focused on ensuring systems respond in some effective way to a user’s abilities. Whereas this principle is system-focused, the biomechanical view of ability is more person-focused. It is not so much about a person performing to bring about a result in the world, but about a person’s functioning as a property of the body itself. The implications for ability-based design are that, under the biomechanical view, ability is to be codified as functional capacity, almost independent of what that capacity can *produce* in the world. This may seem counterintuitive to the goals of ability-based design, in that ability-based systems are those that are meant to uphold what a user *can do*. However, systems that disregard the body’s base functioning capacity ignore information about ability that is task-agnostic and therefore generalizable. Furthermore, this view of ability helps to emphasize that what a body *can do* need not always be performance based, but can also be about how the body comfortably exists in the world.

3.2 Daily Activities and Quality of Life as “Ability”

Instead of directly measuring motor function, another approach is to measure a person’s ability to do activities of daily living and any symptoms or limitations present during such activities. These measures can either be through patient-reported outcomes or clinician observation. For example, the gross motor function classification system (GMFCS) and manual ability classification system (MACS) are both systems that describe gross—meaning overall—motor function for children with cerebral palsy [81]. These two motor ability measures are both five-level ordinal scales determined by clinician observation. The first scale, GMFCS, describes self-initiated gross motor function during and between everyday activities such as walking, standing, sitting, and any concurrent reliance on assistive devices for children aged 6–12 [76, 81, 129]. Palisano et al. [77] expanded and revised the GMFCS (as the GMFCS-E&R) to support kids aged 12–18 to better reflect the International Classification of Functioning, Disability and Health [75], and reflect both the patient’s capability and performance and the influence of environmental factors. The second scale, MACS, is an upper-limb complement to the GMFCS that describes activities of daily living such as playing or dressing [17, 81].

Although the GMFCS and MACS are specific to cerebral palsy, there are also examples of tests that are agnostic to diagnosis. For example, the disability of the arm, shoulder and hand (DASH) questionnaire was specifically designed to be able to relate upper-extremity conditions by burden [35, 36]. The DASH is a 30 item questionnaire where each question is graded on a 5- or 7-point Likert scale. It includes questions that ask about a person’s symptoms (pain, weakness, stiffness, tingling, numbness) as well as functional status (physical, social, and psychological) [36]. A shortened version of the DASH questionnaire, called QuickDASH, which contains 11 of the items of the original DASH, has also been developed [9].

Instead of relying on patient reported outcomes or clinician observations, some ability assessments measure performance outcomes of activities of daily living. For example, the Jebsen-Taylor Hand Function Test times patients as they perform a variety of tasks [85]; however, the test has been shown to have poor correlation with patient-reported outcomes [14], calling its validity into question.

In contrast to the biomechanical view of ability, measures and metrics from activities of daily living (ADL) and quality of life (QoL) orient ability as an interplay between the body and the outside world. The biomechanical view of ability is isolationist; ability exists unchanged regardless of context or the world around it because it is located entirely in the body. By contrast, when ability is viewed through an ADL and QoL lens, it is drawn out of the body and located as an interplay of the body and the world. This blending aligns closer to the view of ability in ability-based design, especially with its treatment of so-called “situational impairments” [95, 121]. Furthermore, many metrics from ADL and QoL represent a subjective, first-person experience of ability. Indeed, many current examples of ability-based design take a performance-based view of ability (e.g., [84]), but ADL and QoL measures can help us to consider *why* performance may be altered and what effect on someone’s life it has. An ability-based system that integrates such measures could use this knowledge to better support their user in accomplishing everyday tasks.

3.3 Human-Computer Input Performance as “Ability”

The field of human-computer interaction (HCI) has developed many measures to quantify how people interact with user interfaces, whether digital or physical. These measures are often task-specific. For example, many measures focus on information transmission via pointing, including target selection speed, target selection accuracy, and Fitts’ law throughput [56, 58, 102, 132]. Text entry is also a canonical form of information transmission to computers, and metrics such as text entry speed [57], accuracy [100], and throughput [135] quantify input performance. Numerous additional metrics have been developed for text entry as well [3, 60, 101, 119, 134]. Similar notions of input efficiency have even been developed for brain-computer interfaces [128].

Fitts’ law [21] was first used as a model in HCI [12] to relate the time required to select a target to target size and movement distance in aimed pointing tasks. Different approaches have been taken to building Fitts’ law models, with details varying as to how experimental procedures are run, how pointing tasks are configured, and how regression coefficients are established [10, 39, 61, 70, 71, 102, 106, 126, 132, 133]. Further, of key importance is Fitts’ throughput metric [58], a form of information transfer rate (ITR), which unifies speed and accuracy as a measure of efficiency. (Similar constructs have been developed recently for text entry [135].) This view primarily holds that people’s abilities are measured by *input efficiency*. Although these measures were not necessarily created as explicit measures of ability, they are often used as such in HCI (e.g., [25]). Ability-based design itself had an early focus on pointing device performance for people with motor impairments [120].

Beyond quantifying efficiency in aimed pointing movements, other metrics in HCI provide descriptive statistics for how a user moves through space when selecting a target. Mackenzie et al. [59] established additional accuracy measures for mouse movement when selecting a target. These measures include movement variability, target re-entry, task axis crossing, movement direction change, orthogonal direction change, movement error, and movement offset. Keates et al. [45] extended these metrics for users with motor impairments, which were further built upon by Hawang et al. [38]. While the original intent of these metrics was to describe the dynamics behind overall pointing speed, accuracy, and efficiency [38, 45, 59], utilization of these movement metrics to inform system design has been shown to be beneficial for individuals with disabilities [122, 123]. This work presents a promising avenue for these metrics to represent ability in ability-based design.

Unsurprisingly, given the history of HCI, many of these metrics describe interaction with a pointing device and cannot always be applied to alternative input devices. For example, touch interactions unfold over time and space, and multiple touches can occur concurrently. Kong et al. [52] developed new metrics to quantify the time-varying behavior of touches given their non-instantaneous action and 2-D footprint. These metrics were inspired by those from MacKenzie et al. concerning mouse movement [59].

More recently, with the advent of ubiquitous computing, HCI has utilized sensors originally from biomechanics and health sensing to measure ability or accommodate situational impairments [121]. For example, accounting for perturbations in touchscreen typing while walking using accelerometers has shown to increase typing accuracy [30]. A similar correction was employed to measure and account for the effect of hand position while touchscreen typing [31]. Mariakakis et al. [63] detected inebriation using a combination of a phone’s built-in sensors and a small battery of human performance tasks on a touch screen that took about four minutes to perform.

These advances in ubiquitous computing have allowed for the monitoring and diagnosis of abilities. For example, motor manifestations of Parkinson’s disease (PD) were detected while typing on a touch screen [4] and on a keyboard [28]. These and other studies were described in an extensive review of remote assessments of hand function [34], which covered people with PD, stroke, multiple sclerosis (MS), spinal cord injury, and amyotrophic lateral sclerosis (ALS).

Individual efforts at employing ability-based design offer differing perspectives on how to characterize “ability.” Sarcar et al. [91] used models of tremor, dyslexia, and memory dysfunction for text entry performance on touchscreen devices to optimize keyboard key-size and the number of word predictions offered. Another approach to keyboard optimization utilized user-specific models of ability that incorporated how a user’s abilities might differ when moving in different directions to optimize keyboard layout [70, 71]. As noted, SUPPLE automatically generated user interfaces by representing a user’s pointing abilities as regression models that parameterized a decision-theoretic optimization process [25–27].

Alongside specific implementations of ability-based design, other implementations of user-specific modeling offer insight on how to measure and adapt to ability. For example, Findlater and Wobbrock [20] modeled a user’s keypresses to adapt the underlying classification model for a touchscreen keyboard. Hurst et al. [37]

detected users with and without pointing problems and predicted whether preventing accidental clicks and slips [105] would improve pointing issues.

Other systems take approaches that are about minimizing human error. For example, models of intelligence [40, 43] and psychomotor ability [42] have been used to optimize how a machine provides error correction and automation. These models were developed by assessing the motor control and ability to navigate a wheelchair by study participants.

Assessing a person's ability to interact with technology is also necessary to help prescribe interventions and assign assistive devices. As noted above, Koester et al. [47] built COMPASS, a software-based assessment tool for clinicians to measure desktop computer skills in order to select appropriate assistive interventions. On a smartphone, the SmartAbility app [118] maps abilities to specific assistive technologies based on user performance in a variety of tasks.

A highly apparent theme running throughout these metrics is how performance-oriented they are. Speed, accuracy, and efficiency are of primary importance where input devices and techniques are concerned. Indeed, this is not surprising for understanding "ability" in HCI, as pointing, text entry, and touch are pervasive and repetitive tasks. But such a view greatly limits a more holistic account of ability, even motor ability. People's abilities, even concerning computer use, extend well beyond their psychomotor task performance with input devices. Although ability-based design has been mostly applied in computing contexts (with some exceptions, e.g., [110]), it would benefit greatly from wider treatments of ability than just users' psychomotor behaviors. For example, cognitive, learning, and social abilities are highly relevant to computer use today.

Our extensive literature review has revealed that "ability" has primarily been characterized by biomechanical functioning, activities of daily living (ADL) and quality of life (QoL) issues, or human performance with computer input devices. Each of these views does indeed capture something about ability, but as to their use in ability-based design, the first and third tend to be overly narrow, while the second is overly broad and specific to everyday tasks. Something else is needed. We turn to this challenge in the next section.

4 Distilling "Ability" for Ability-Based Design

To organize the many metrics and measures presented above, we offer a framework for characterizing "ability." This framework establishes a robust concept of ability that represents its multiple facets, not just any one view encountered thus far. Indeed, this framework does not redefine any individual definitions of ability, but rather coalesces and synthesizes them. This framework is built of off conceptual user models that relate the *user*, *context*, and *task* [74]. Further, this framework is capable of representing multiple models of disability (e.g., social, medical).

Our ability framework is built of three axes: the *user* axis, *task* axis, and *context* axis. The *user* axis represents *who* is observing the metric, the *context* axis reflects the user's environment, and the *task* axis reflects the user's current situation. Each axis is defined by endpoints that reflect the span of the axis; the *user* axis extends from self-reported metrics to observed-by-others, the *context* axis

spans metrics that represent internal to external context, and the *task* axis extends from task-agnostic to task-specific metrics. With this framework, any metric of ability can be placed inside the space created by these axes (Figure 1). Further, to represent "ability" in ability-based design, an interactive system should embody multiple points within this space, even aiming to occupy the extents of the three axes by employing multiple metrics.

These axes are grounded in work that relates *user*, *context*, and *task* [74], while also reflecting arguments that have been made to support multiple models of disability in HCI. Mankoff et al. [62] discusses flaws in models of disability, arguing that despite these flaws, these models still have their benefits, as long as they are working in concert with each other. The framework we have built to represent ability parallels this point, intertwining social, environmental, health, and other factors that compose ability and disability.

In addition, when utilizing this three-axis system, in order to reduce the burden on the user, one should aim to minimize the number of tasks the user must complete. In addition, when alternative metrics are available, one should limit the use of disease- and diagnosis-specific measures to limit the storage of personally identifiable information.

4.1 User Axis: Metrics that Reflect Different Points of View of the User

The *user* axis reflects the *who* is observing the user and spans from "1st person" to "3rd person." The first-person metrics are self-reported measures, while third-person metrics are observed by a third-party, whether that be a clinician, researcher, computer system, or other outside observer. Metrics that are composed of first-person and third-person data types fall between the two endpoints of the axis. Biomechanical measures, HCI input metrics, and wearable health data are some of the fundamental measures of ability that can exist along this axis. Among biomechanical measures, measures like the Fugl-Meyer assessment [23], which gives a complex understanding of both motor and sensory function, as well as range-of-motion and pain, would fit in the middle of the axis, as it is composed of both self-reported information and clinician observations. Instances of biomechanical metrics that fall towards the third-person end of the axis include wearable health data, obtained both in single instances and by continuous tracking. Additional consumer-facing signals could be heart rate and inertial sensing, signals common to most consumer smartwatches. Less common in consumer electronics, but under active investigation in HCI, are electromyography (EMG) measurements [16]. Quality of life metrics such as the disability of the arm, shoulder and hand (DASH) questionnaire [35, 36] and QuickDASH [9], populate the first-person end of the user axis, as they are reflections by the user.

Existing work in HCI that includes personalization, including implementations of ability-based design, provide thoughtful examples on how to marry personalized interaction with HCI metrics to create decontextualized measures that could exist along the user axis. For example, Mitchell et al. [70, 71] implemented an orientation-specific Fitts' law for each user in the design of their personalized keyboards. Similarly, Trudeau et al. [106] utilized Fitts' law to further examine differences in performance depending on orientation of the thumb when using a mobile phone. Taking into account

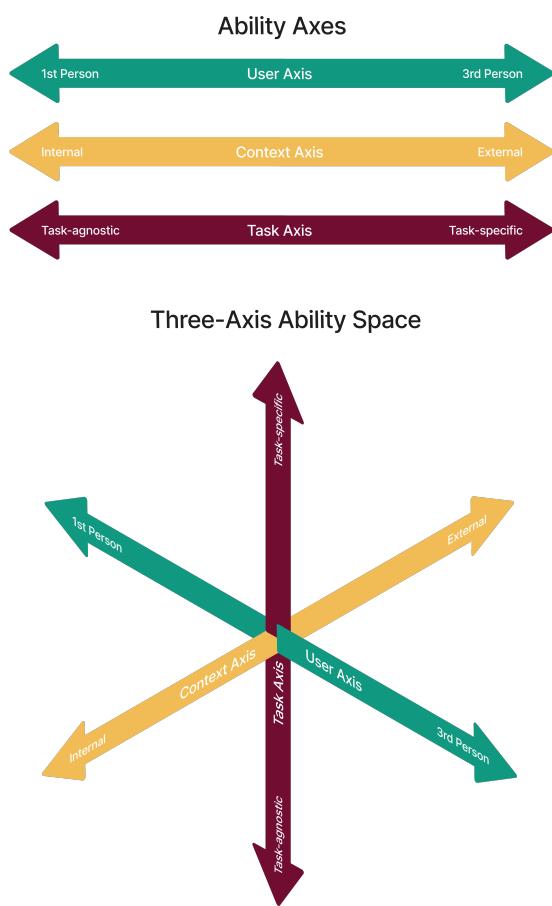


Figure 1: Ability Axes as a three-axis space: the *user axis*, the *context axis*, and the *task axis*. The *user axis* extends from “1st person” to “3rd person,” the *context axis* from “internal” to “external” contexts, and the *task axis* from “task-agnostic” to “task-specific.” These axes are arranged to form a three dimensional axes space that represents ability.

the impact of movement orientation beyond just keyboards could help to build interfaces that are better suited to a user’s abilities. Findlater et al.’s [20] personalized models for 10-finger touchscreen keyboard typing also shows how individualized input models could be leveraged in ability-based design. These examples highlight just a small portion represented by HCI input metrics to capture ability.

4.2 Context Axis: Context-Dependent Measures of Ability

The *context axis* captures ability measures reflecting the environment the the user is operating in. These environmental factors are both external and internal to the user [124]. Of the metric types that could fall along this axis, wearable health data and ubiquitous

sensing data are especially pertinent, as well as quality of life measurements. This axis is organized on one end by measures that capture factors external to the user, while the other end is occupied by factors internal to the user.

Measuring external factors that are environmentally context-dependent helps to account for scenarios such as situationally induced impairments and disabilities (SIDs) [95, 96, 121] as well as other disabling scenarios. For example, when walking, a user might have more errors due to movement or looking around at their surroundings that could be measured and corrected for [30, 72]. Alternatively, a device could sense when a user switches from using the device with two hands to one, perhaps due to needing to carry other objects at the same time [32].

Considering changes in ability that are internal to the user is also for the *context axis*. For many individuals with disabilities and chronic illness, there is significant fluctuation in ability or pain on a daily basis or even within a single day; being able to measure that is important [55, 130]. Accounting for these changes could be done specifically through wearable health data and feedback from the user. Although this end of the axis is user-centered, we chose to separate this from the *user axis* given the importance of considering the user’s abilities not just on average, but in context.

4.3 Task Axis: Task-Dependent Measures of Ability

The last axis we consider for constructing our ability framework is the *task axis*. This axis is built to bring together the behaviors a user has during specific tasks when interacting with technologies and the many existing metrics that already describe these tasks. The two extremes of this axis are task-agnostic and task-specific. When considering where a metric might fall on this axis, it is important to consider whether it explains a user’s ability to do a specific task or not. If the metric addresses a specific task, such as text input or an activity of daily living (ADL), it is task-specific. If a metric generalizes across tasks, it is still task oriented, but it would fall towards the middle of the axis. If a metric does not describe ability as an outcome or output, it is task-agnostic. While the importance of task-specific metrics is self-evident, also having task-agnostic metrics compensates for instances when task-specific metrics are not available and additionally provides a view of the user that is not only task- or outcome-oriented. For example, in the case of text input, only including text entry metrics for an application would fail to address how one might need to navigate between that experience and something else, whether an app or website.

Qualitative measures that reflect quality of life, as well as quantitative HCI input metrics that are not task-specific such as touch metrics [52], would fall on the task-agnostic end of this axis. The task-specific end of the spectrum would largely be occupied by HCI metrics such as text entry measures, as well as metrics that describe ADL. Metrics such as throughput and information transfer rate (ITR) would fall in the middle of the axis. This placement on the axis is because these metrics both have the ability to be task-specific as well as task-agnostic. ITR and throughput are specific to target selection tasks, but also can be generalized for tasks such as text entry.

Alone, these axes each provide unique ways in which ability can be represented. However, the true benefit of these axes lies in relating them to each other and representing ability as a multi-faceted concept. For example, to represent a user's ability with HCI text entry metrics, it is not just representing their ability as task-specific on the *task* axis, but also representing their ability as observable by a third-party on the *user* axis. The ability to generate text is also highly dependent upon the user's *context*; for example, the user could be walking at the same time they are generating text. Using only one metric that represents one point in the space of these axes fails to account for the complex nature of ability that is necessary for systems that implement ability-based design.

5 Considering Personas for Ability-Based Design

To demonstrate the utility of our three-axis ability framework, we offer example personas as plausible fictions, which demonstrate how ability measures can be chosen to thoroughly occupy those axes (Figure 2). These personas show individual possibilities of the axes, and are not meant to represent the full extent and diversity of motor ability, but rather be illustrative of the utility of the axes. Additionally, the utilization of personas can be a helpful exercise for the implementation of ability-based design to successfully combine and consider users, contexts, and tasks. It is important to note that we use personas here to illustrate positions in our 3-D space, not as user caricatures that codify stereotypes or reinforce dominant pre-conceptions, for which personas as design instruments have been reasonably criticized [64]. To reinforce this caveat, we deliberately do not give our personas human names. Rather, think of them as points in our “ability space.”

5.1 Persona Requiring Alternative Access

This persona requires alternative input access to use their tablet, alternating between access methods of switch-scanning and eye-tracking. They must alternate between these methods due to environmental conditions that do not permit eye-tracking or because of fatigue from eye-tracking. The most common task this persona uses their tablet for is composing text, whether emails, text messages, or documents.

To consider relevant measures of ability for this persona, we consider the axes of our framework both independently and together. Given that many tasks this persona performs are related to text entry, we would add a large number of text entry metrics to the *task* axis. These metrics are all fairly low-cost, both computationally and in terms of the effort needed to integrate them into a computer system. For the *context* axis, we could consider internal context, specifically fatigue, as this persona fatigues from use of the eye-tracker. While user fatigue could potentially be measured directly by observing how movement patterns of their eyes change, we also could use task-specific metrics to observe fatigue. Finally, for the *user* axis, we could look at metrics that could quantify the user's motor abilities such as their dexterity and spasticity. These motor abilities are considered so that during use of their switch scanner, the system can understand how often accidental selections occur.

We can also go beyond this persona's use case to consider more individuals that use alternative inputs to access their technology

and how their tasks and contexts differ. Beyond utilizing text entry metrics, we could look at more general HCI metrics such as target selection speed, target selection accuracy, Fitts' law throughput [56, 58], and information transfer rate [128]. These metrics fit a variety of both tasks and contexts. We can also consider a user that only sometimes uses alternative access, for example, someone that alternates between using a tablet with touch and switch-scanning. In this case, we can use touchscreen metrics [52] to monitor fatigue during touch prior to the user changing to switch-scanning.

5.2 Persona with Limited Fine Motor Control

This persona has Parkinson's disease, resulting in limited fine motor control. Her primary interactions with technology are for communication purposes; she frequently calls, video-chats, and texts her family and friends. She will often receive pictures and videos that she likes to save for future reference. However, this persona has difficulty navigating these tasks at times due to her tremor. It is time-consuming for her to compose a text message, and sometimes she will give up and call instead, even if it is inconvenient. Sometimes she will also decline a call that she meant to accept due to her tremor. She has found adaptations by using a voice assistant, but she is not entirely happy with this solution.

How might we go about characterizing the abilities of this persona using our framework? Similar to the first persona, we can consider a large number of text entry metrics for the *task* axis [3, 100]. In addition, we can add general non-task-specific metrics, such as touch metrics [52]. Given that this persona has Parkinson's disease, we can consider metrics for the *user* axis, such as Movement Disorder Society's Unified Parkinson's Disease Rating Scale (MDS-UPDRS), which contains components along the user axis, given it's reflection of both quality of life and motor movements. Considering the *context* axis, we look at both external and internal factors for this persona. Individuals with Parkinson's disease often have daily fluctuations in ability, especially as medication wears off [83]. Furthermore, the motor manifestations of Parkinson's disease might not be symmetric [88], and so her ability to do tasks could vary significantly by which hand she was using to hold the phone and use it. These symptoms are why it would be important to consider onboard sensing to determine her grip pattern.

Expanding this persona to additional devices, one could consider factors for the *context* axis, such as device-specific measurements. For this persona, such device-specific measurements would translate to input-specific measurements, for example, in the case of a desktop computer controlled by a mouse, measuring jitter. Expanding to other diagnoses beyond Parkinson's, including the case in which there is no diagnosis, one could add metrics to the *user* axis such as disability of the arm, shoulder and hand (DASH) [35, 36] or the shortened version, the QuickDASH [9].

5.3 Persona Experiencing a Movement-Induced Situational Impairment

This persona works at home two days a week and the other days works in an office. When she works in her office, she commutes by bus and on foot. During her bus commute, she often reads books she has downloaded onto her phone. Sometimes while on the bus she answers emails, especially if she is running late. Only occasionally

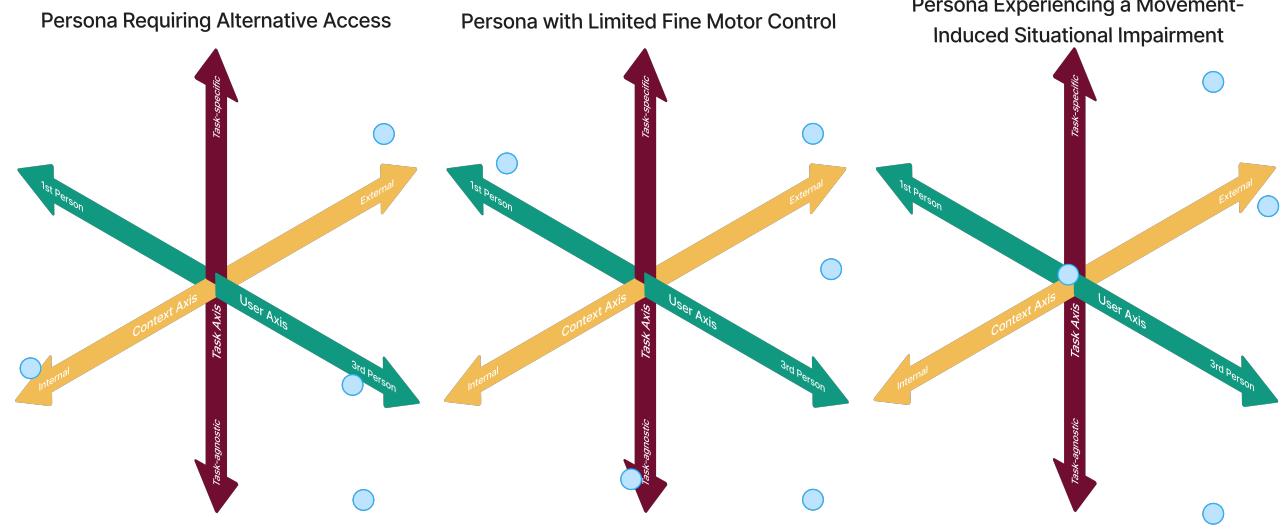


Figure 2: Example personas demonstrating how metrics to describe ability occupy the extents of the ability axes.

will she answer emails while she is walking to or from the bus. On days that she is working from home, she often will take phone calls while she is on a walk. During this time, she will sometimes have to look at her phone to reference an email or her calendar.

To start constructing metrics around this persona, we first consider the *context* axis, given that she is using her phone under multiple different environmental conditions that will all influence her ability to operate the phone accurately. The phone’s onboard sensors can measure acceleration and rotation whether due to the movement of the bus, or the user’s movement while she is walking or handling the phone. If she is wearing a smartwatch, its onboard inertial sensors can further be utilized to anchor the phone’s movement and differentiate between *her* moving the phone and the *environment* moving the phone. These measurements for the context axis play into the *task* axis, as having highly precise movements matter more when the user is composing an email as opposed to when she is reading.

For the tasks she does, we would consider text entry metrics [3, 119]. We additionally consider more general metrics that reflect the user’s ability to operate her phone, specifically touch metrics [52]. In the case of a user such as this persona, we would rely less on the *user* axis, especially as she would have fewer, if any, clinical metrics relevant to her.

Expanding beyond this persona to a more general persona under a movement-induced situational impairment, we could utilize clinical metrics that fall along the user axis, especially those relevant to the effects of motion. For example, these metrics could reflect a person’s proneness to fatigue as they walk or those who have limited fine motor control, as individuals with limited fine motor control would have even more difficulty composing emails on a bus with extraneous motion.

6 Discussion

Our literature review uncovered three general ways that “motor ability” has been characterized: by one’s biomechanical function, by activities of daily living (ADL) or quality of life (QoL) issues, and by use of input devices in human-computer interaction (HCI). All three of these characterizations were limited in significant ways, but taken together, they informed a rich perspective on ability.

Leveraging the above notions of ability, our three-axis ability framework for ability-based design consisted of the *user*, the *context*, and the *task*, enabling us to consider numerous metrics for characterizing “ability” for our personas. We organized this axis space to reflect current work in ability-based design [124] as well as conceptual user modeling [74]. These axes are also designed to be set together as a three-dimensional space to indicate that these considerations cannot be fully separated when modeling ability. We include Table 1, which details each metric we reviewed, explaining where in the three-axis space it sits.

The extents of each axis were chosen to represent a range of abilities. For the *user* axis, choosing both qualitative and quantitative measures of ability allows for both unbiased measurements as well as the user’s perspective on their abilities. To this latter point, we stress that any system that uses ability-based design must reflect a user’s abilities as the user sees them, not just as they are computationally assessed. For the *context* axis, we chose the extents to be internal and external. This choice was in view of literature that argues for the importance of designing to account for natural variations and fluctuations in abilities (internal contexts) [55, 124] as well the social model of disability (external contexts) [98]. Finally for the *task* axis, we chose extents that allowed the axis to reflect the wide variety of metrics that are available for use. Many of these are not task-specific or directly translate to activities involved with

Table 1: Measures of Motor Ability and their Categorization

Measure	Assessment Method	Axis Location			References
		User	Task	Context	
Body Mechanics	Computer Systems	3rd Person	Midpoint	Midpoint	[5, 6, 15, 53, 89, 94, 97, 103, 104]
	Clinician Observation	3rd Person	Midpoint	Midpoint	[29, 69, 78]
Functional Body Mechanics	Computer Systems	3rd Person	Midpoint	Midpoint	[46, 65–68, 86, 99]
	Clinician Observation	3rd Person	Midpoint	Midpoint	[22, 23, 29, 69, 82, 87]
ADL	Clinician Observation	3rd Person	Task-specific	Midpoint	[14, 17, 76, 77, 81, 81, 85, 129]
QoL	Self-reported	1st Person	Midpoint	Midpoint	[9, 35, 36]
Target Selection	Information Transmission	3rd Person	Midpoint	Midpoint	[56, 58, 58, 102, 132]
	Movement Patterns	3rd Person	Midpoint	Midpoint	[38, 45, 59]
Text Entry	Efficiency	3rd Person	Task-specific	Midpoint	[3, 100, 119, 135]
Touch	Movement Patterns	3rd Person	Task-agnostic	Midpoint	[52]
Situational Impairments	Movement Patterns	3rd Person	Midpoint	External	[30, 31, 121]
Disease Monitoring	Movement Patterns	3rd Person	Midpoint	Internal	[4, 28, 34]

technology, yet they reflect vital perspectives such as the user's perceptions of their abilities.

These axes reflect the interplay of different models of disability stressed by other researchers in HCI. Mankoff et al. [62] and Mack et al. [55] both emphasized the balance between medical and social models and how each can describe different aspects of ability and disability. The design of our axes also opens up the possibility to use various metrics from a new perspective. For example, while many of the metrics we described were clinical, such metrics could be employed under contextual factors to describe natural internal fluctuations or external environmental factors as well.

With these axes in view, practitioners of ability-based design should be able to maximize coverage over the axis space to create systems that are robust to users' abilities, both objective and subjective, translatable, yet specific across devices, contextualized to the task at hand, and robust to external environmental conditions and changes in a user's abilities.

Although we specifically address metrics that measure motor abilities for the scope of this paper, there are other measures of ability that influence motor ability, yet are not direct measures of motor ability itself. For instance, the ability to access medication that improves tremor from Parkinson's disease is a contextual measure of ability. We therefore must also consider larger environmental, contextual, and social metrics when considering motor ability to avoid creating systems that are not representative of users.

Furthermore, our framework's axes represent how ability can best be represented *in* an interactive system. Ability is, in reality, an incredibly complex concept, one for which individual metrics do not—and never can—fully encapsulate the lived experiences of the individual they are characterizing. But the more our computing systems can accurately understand our abilities, the more responsive they can be to accommodating them.

6.1 Limitations

A limitation of this work is that it only considered users' motor abilities. We incurred this limitation when building our framework for ability-based design given the myriad metrics that represent motor abilities. Our belief is that given the wide variety of metrics that this infrastructure supports, the framework would be translatable to other types of abilities. Additionally, these axes could help support the identification of new metrics to fill out the axis space for these other ability types (e.g., cognitive, sensory).

This work stops short of actually implementing an interactive ability-based system using our ability framework. Rather, we chose to focus on our extensive literature review and synthesis to emphasize that HCI can integrate metrics from other fields for ability-based design. Our three axes are also generally supported in literature as ways to model users [74], and so there is a strong foundation for structuring these axes as we did.

Finally, this work focuses on the measurement of ability to aid the implementation of ability-based design. We recognize that this aspect is only one facet of the implementation of ability-based design; design process is another, unaddressed here. Furthermore, measuring ability, especially using clinical tools, leans towards the medical model of disability; we juxtapose that with the *context* axis that discusses metrics from the social model of disability [62, 98].

7 Future Work

This work outlined a framework for characterizing “ability” for ability-based design, but did not exercise the framework in an end-to-end design process through implementing an actual ability-based system. We leave such an endeavor for future work. Doing so would enable us to consider the framework and its many metrics for possible inclusion in a working system, and to assess the “coverage” of the three-dimensional space of the framework by the metrics under consideration.

While this work highlighted the move from implicit notions of ability to concrete notions of ability for motor ability, we envision that the framework we developed will extend to disabilities beyond motor disabilities. We hope future work explores this transition for other disabilities and furthermore, implements systems using this framework for other disabilities.

The integration of clinical metrics into ability-based systems raises privacy concerns that are not present in systems that rely solely on traditional HCI metrics to capture ability. Systems that use these metrics will need to adopt security practices that ensure proper storage and access of this information and additionally ensure the user feels at ease with volunteering such information. Furthermore, future work could investigate the correlation between measures of ability outside of HCI to measures from within HCI so that these HCI measures could act as proxy measurements. Finding correlations could enable a system designer to reduce any reliance on clinical metrics that have patient-sensitive information. Moreover, HCI-specific metrics showing high correlations with clinical measures would allow for more metrics to be accessible to those that have difficulty obtaining a clinical assessment [47, 48].

8 Conclusion

Current implementations of ability-based systems offer unspoken or piecemeal approaches to defining and measuring ability, the central concept in ability-based design [124, 125]. To erect a unified framework for characterizing “ability,” we reviewed measures of motor ability from the fields of rehabilitation, occupational and physical therapy, medicine, biomechanics, HCI, and more. We described the approaches these metrics take to measuring ability and organized these metrics into a three-axis framework for ability-based design. These axes are the *user* (from 1st person to 3rd person), *context* (from the user’s internal context to the environment’s external context), and finally, the *task* (from task-agnostic to task-specific). We also provided example personas that utilize metrics that occupy this three-axis space to demonstrate the utility of the axes. It is our hope that by characterizing “ability,” the creation of ability-based systems can be more informed, inclusive, and successful.

Acknowledgments

This work was supported in part by a National Science Foundation Graduate Research Fellowship and the University of Washington Center for Research and Education on Accessible Technology and Experiences (CREATE). Any opinions, findings, conclusions or recommendations expressed in our work are those of the authors and do not necessarily reflect those of any supporter.

References

- [1] Shirley Ryan AbilityLab. 2018. Rehabilitation Measures Database. <https://www.sralab.org/rehabilitation-measures>
- [2] Ahmad Alsaleem, Ross Imburgia, Andrew Merryweather, Jeffrey Rosenbluth, Stephen Trapp, and Jason Wiese. 2020. Applying Ability-Based Design Principles to Adaptive Outdoor Activities. In *Proceedings of the 2020 ACM Designing Interactive Systems Conference (DIS '20)*. Association for Computing Machinery, New York, NY, USA, 1–12. <https://doi.org/10.1145/3357236.3395508> event-place: Eindhoven, Netherlands.
- [3] Ahmed Sabbir Arif and Wolfgang Stuerzlinger. 2009. Analysis of text entry performance metrics. In *2009 IEEE Toronto International Conference Science and Technology for Humanity (TIC-STH)*. IEEE, 100–105. <https://doi.org/10.1109/TIC-STH.2009.5444533>
- [4] Teresa Arroyo-Gallego, María Jesus Ledesma-Carbayo, Álvaro Sánchez-Ferro, Ian Butterworth, Carlos S. Mendoza, Michele Matarazzo, Paloma Montero, Roberto López-Blanco, Verónica Puertas-Martín, Rocío Trincado, and Luca Giannicardo. 2017. Detection of Motor Impairment in Parkinson’s Disease Via Mobile Touchscreen Typing. *IEEE Transactions on Biomedical Engineering* 64, 9 (Sept. 2017), 1994–2002. <https://doi.org/10.1109/TBME.2017.2664802> Conference Name: IEEE Transactions on Biomedical Engineering.
- [5] Richard Baker. 2006. Gait analysis methods in rehabilitation. *Journal of Neuro-Engineering and Rehabilitation* 3, 1 (March 2006), 4. <https://doi.org/10.1186/1743-0003-3-4>
- [6] John V. Basmajian. 1985. Description and Analysis of the EMG Signal. In *Muscles Alive* (5th ed.). Williams and Wilkins, Baltimore, MD. https://www.delucadefinition.org/download/bibliography/de-luca/books_muscles-alive-03.pdf
- [7] Andrew A. Bayor. 2019. HowToApp: Supporting Life Skills Development of Young Adults with Intellectual Disability. In *Proceedings of the 21st International ACM SIGACCESS Conference on Computers and Accessibility (ASSETS '19)*. Association for Computing Machinery, New York, NY, USA, 697–699. <https://doi.org/10.1145/3308561.3356107> event-place: Pittsburgh, PA, USA.
- [8] Andrew A. Bayor, Laurianne Sitton, Bernd Polderer, Filip Bircanin, and Margot Brereton. 2019. “TechShops” Engaging Young Adults with Intellectual Disability in Exploratory Design Research. In *Extended Abstracts of the 2019 CHI Conference on Human Factors in Computing Systems (CHI EA '19)*. Association for Computing Machinery, New York, NY, USA, 1–8. <https://doi.org/10.1145/3290607.3299056> event-place: Glasgow, Scotland UK.
- [9] Dorcas E. Beaton, James G. Wright, Jeffrey N. Katz, and The Upper Extremity Collaborative Group. 2005. Development of the QuickDASH: Comparison of Three Item-Reduction Approaches. *JBJS* 87, 5 (May 2005), 1038. <https://doi.org/10.2106/JBJS.D.02060>
- [10] James Boritz, Kellogg S. Booth, and William B. Cowan. 1991. Fitts’s Law Studies of Directional Mouse Movement. *Human Performance* 1, 6 (1991), 216–223.
- [11] Tom Brinck, Darren Gergle, and Scott D. Wood. 2001. *Usability for the Web: Designing Web Sites that Work*. Elsevier. Google-Books-ID: c2WUNSwWrkEC.
- [12] Stuart K. Card, W. K. English, and B. J. Burr. 1978. Evaluation of mouse, rate-controlled isometric joystick, step keys, and text keys for text selection on a CRT. *Ergonomics* 21, 8 (1978), 601–613.
- [13] Mark J. Connick, Emma Beckman, Rebecca Deuble, and Sean M. Tweedy. 2016. Developing tests of impaired coordination for Paralympic classification: normative values and test-retest reliability. *Sports Engineering* 19, 3 (Sept. 2016), 147–154. <https://doi.org/10.1007/s12283-016-0199-5>
- [14] Erika Davis Sears and Kevin C. Chung. 2010. Validity and Responsiveness of the Jebsen–Taylor Hand Function Test. *The Journal of Hand Surgery* 35, 1 (Jan. 2010), 30–37. <https://doi.org/10.1016/j.jhsa.2009.09.008>
- [15] Scott L. Delp, Frank C. Anderson, Allison S. Arnold, Peter Loan, Ayman Habib, Chand T. John, Eran Guendelman, and Darryl G. Thelen. 2007. OpenSim: Open-Source Software to Create and Analyze Dynamic Simulations of Movement. *IEEE Transactions on Biomedical Engineering* 54, 11 (Nov. 2007), 1940–1950. <https://doi.org/10.1109/TBME.2007.901024> Conference Name: IEEE Transactions on Biomedical Engineering.
- [16] Ethan Eddy, Erik J Scheme, and Scott Bateman. 2023. A Framework and Call to Action for the Future Development of EMG-Based Input in HCI. In *Proceedings of the 2023 CHI Conference on Human Factors in Computing Systems (CHI '23)*. Association for Computing Machinery, New York, NY, USA, 1–23. <https://doi.org/10.1145/3544548.3580962>
- [17] Ann-Christin Eliasson, Lena Krumlind-Sundholm, Birgit Röslblad, Eva Beckung, Marianne Arner, Ann-Marie Öhrvall, and Peter Rosenbaum. 2006. The Manual Ability Classification System (MACS) for children with cerebral palsy: scale development and evidence of validity and reliability. *Developmental Medicine & Child Neurology* 48, 7 (July 2006), 549–554. <https://doi.org/10.1111/j.1469-8749.2006.tb01313.x> _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1111/j.1469-8749.2006.tb01313.x>
- [18] Shelley Evenson, Justin Rheinfrank, and Hugh Dubberly. 2010. Ability-centered design: from static to adaptive worlds. *Interactions* 17, 6 (Nov. 2010), 75–79. <https://doi.org/10.1145/1865245.1865263>
- [19] Susan Koch Fager, Melanie Fried-Oken, Tom Jakobs, and David R. Beukelman. 2019. New and emerging access technologies for adults with complex communication needs and severe motor impairments: State of the science. <https://doi.org/10.1080/07434618.2018.1556730> 35, 1 (Jan. 2019), 13–25. <https://doi.org/10.1080/07434618.2018.1556730> Publisher: Taylor & Francis.
- [20] Leah Findlater and Jacob O. Wobbrock. 2012. Personalized Input: Improving Ten-Finger Touchscreen Typing through Automatic Adaptation. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*. ACM, 815–824. ISBN: 9781450310154.
- [21] Paul M. Fitts. 1954. The information capacity of the human motor system in controlling the amplitude of movement. *Journal of Experimental Psychology* 47, 6 (1954), 381–391.
- [22] H. L. Frankel, D. O. Hancock, G. Hyslop, J. Melzak, L. S. Michaelis, G. H. Ungar, J. D. S. Vernon, and J. J. Walsh. 1969. The value of postural reduction in the

initial management of closed injuries of the spine with paraplegia and tetraplegia. *Spinal Cord* 7, 3 (Nov. 1969), 179–192. <https://doi.org/10.1038/sc.1969.30> Number: 3 Publisher: Nature Publishing Group.

[23] A. R. Fugl-Meyer, L. Jääskö, I. Leyman, S. Olsson, and S. Steglind. 1975. The post-stroke hemiplegic patient. 1. a method for evaluation of physical performance. *Scandinavian Journal of Rehabilitation Medicine* 7, 1 (1975), 13–31.

[24] Krzysztof Gajos and Daniel S. Weld. 2004. SUPPLE: automatically generating user interfaces. In *Proceedings of the 9th international conference on Intelligent user interfaces (IUI '04)*. ACM Press, New York, NY, USA, 93–100. <https://doi.org/10.1145/964442.964461>

[25] Krzysztof Z. Gajos, Daniel S. Weld, and Jacob O. Wobbrock. 2010. Automatically generating personalized user interfaces with SUPPLE. *Artificial Intelligence* 174 (2010), 910–950. <https://doi.org/10.1016/j.artint.2010.05.005>

[26] Krzysztof Z. Gajos, Jacob O. Wobbrock, and Daniel S. Weld. 2007. Automatically generating user interfaces adapted to users' motor and vision capabilities. In *Proceedings of the 20th annual ACM symposium on User interface software and technology (UIST '07)*. ACM Press, New York, NY, USA, 231–240. <https://doi.org/10.1145/1294211.1294253>

[27] Krzysztof Z. Gajos, Jacob O. Wobbrock, and Daniel S. Weld. 2008. Improving the performance of motor-impaired users with automatically-generated, ability-based interfaces. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '08)*. ACM Press, New York, NY, USA, 1257–1266. <https://doi.org/10.1145/1357054.1357250>

[28] L. Giancardo, A. Sánchez-Ferro, T. Arroyo-Gallego, I. Butterworth, C. S. Mendoza, P. Montero, M. Matarazzo, J. A. Obeso, M. L. Gray, and R. San José Estépar. 2016. Computer keyboard interaction as an indicator of early Parkinson's disease. *Scientific Reports* 6 (Oct. 2016), 34468. <https://doi.org/10.1038/srep34468>

[29] David J. Gladstone, Cynthia J. Danells, and Sandra E. Black. 2002. The Fugl-Meyer Assessment of Motor Recovery after Stroke: A Critical Review of Its Measurement Properties. *Neurorehabilitation and Neural Repair* 16, 3 (Sept. 2002), 232–240. <https://doi.org/10.1177/154596802401105171> Publisher: SAGE Publications Inc STM.

[30] Mayank Goel, Leah Findlater, and Jacob Wobbrock. 2012. WalkType: using accelerometer data to accommodate situational impairments in mobile touch screen text entry. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '12)*. Association for Computing Machinery, New York, NY, USA, 2687–2696. <https://doi.org/10.1145/2207676.2208662>

[31] Mayank Goel, Alex Jansen, Travis Mandel, Shwetak N. Patel, and Jacob O. Wobbrock. 2013. ContextType: using hand posture information to improve mobile touch screen text entry. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '13)*. Association for Computing Machinery, New York, NY, USA, 2795–2798. <https://doi.org/10.1145/2470654.2481386>

[32] Mayank Goel, Jacob Wobbrock, and Shwetak Patel. 2012. GripSense: Using Built-in Sensors to Detect Hand Posture and Pressure on Commodity Mobile Phones. In *Proceedings of the 25th Annual ACM Symposium on User Interface Software and Technology (UIST '12)*. Association for Computing Machinery, New York, NY, USA, 545–554. <https://doi.org/10.1145/2380116.2380184> event-place: Cambridge, Massachusetts, USA.

[33] Christopher G. Goetz, Barbara C. Tilley, Stephanie R. Shaftman, Glenn T. Stebbins, Stanley Fahn, Pablo Martinez-Martin, Werner Poewe, Cristina Sampaio, Matthew B. Stern, Richard Dodel, Bruno Dubois, Robert Holloway, Joseph Jankovic, Jaime Kulisevsky, Anthony E. Lang, Andrew Lees, Sue Leurgans, Peter A. LeWitt, David Nyenhuis, C. Warren Olanow, Olivier Rascol, Annette Schrag, Jeanne A. Teresi, Jacobus J. van Hilten, and Nancy LaPelle. 2008. Movement Disorder Society-sponsored revision of the Unified Parkinson's Disease Rating Scale (MDS-UPDRS): Scale presentation and clinimetric testing results. *Movement Disorders* 23, 15 (2008), 2129–2170. <https://doi.org/10.1002/mds.22340> eprint: <https://movementdisorders.onlinelibrary.wiley.com/doi/pdf/10.1002/mds.22340>

[34] Arpita Gopal, Wan-Yu Hsu, Diane D. Allen, and Riley Bove. 2022. Remote Assessments of Hand Function in Neurological Disorders: Systematic Review. *JMIR rehabilitation and assistive technologies* 9, 1 (March 2022), e33157. <https://doi.org/10.2196/33157>

[35] Christina Gummesson, Isam Atroshi, and Charlotte Ekdahl. 2003. The disabilities of the arm, shoulder and hand (DASH) outcome questionnaire: longitudinal construct validity and measuring self-rated health change after surgery. *BMC Musculoskeletal Disorders* 4, 1 (June 2003), 11. <https://doi.org/10.1186/1471-2474-4-11>

[36] Pamela L. Hudak, Peter C. Amadio, Claire Bombardier, Dorcas Beaton, Donald Cole, Aileen Davis, Gillian Hawker, Jeffrey N. Katz, Matti Makela, Robert G. Marx, Laura Punnett, and James Wright. 1996. Development of an upper extremity outcome measure: The DASH (disabilities of the arm, shoulder, and head). *American Journal of Industrial Medicine* 29, 6 (1996), 602–608. [https://doi.org/10.1002/\(SICI\)1097-0274\(19960629\)29:6<602::AID-AJIM4>3.0.CO;2-L](https://doi.org/10.1002/(SICI)1097-0274(19960629)29:6<602::AID-AJIM4>3.0.CO;2-L) eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1002/%28SICI%291097-0274%28199606%2929%3A6%3C602%3A%3AAID-AJIM4%3E3.0.CO%3B2-L>

[37] Amy Hurst, Scott E. Hudson, Jennifer Mankoff, and Shari Trewin. 2008. Automatically detecting pointing performance. In *Proceedings of the 13th international conference on Intelligent user interfaces (IUI '08)*. Association for Computing Machinery, New York, NY, USA, 11–19. <https://doi.org/10.1145/1378773.1378776>

[38] Faustina Hwang, Simeon Keates, Patrick Langdon, and John Clarkson. 2003. Mouse movements of motion-impaired users: a submovement analysis. *ACM SIGACCESS Accessibility and Computing* 77–78 (Sept. 2003), 102–109. <https://doi.org/10.1145/1029014.1028649>

[39] Richard J. Jagacinski and Donald L. Monk. 1985. Fitts' law in two dimensions with hand and head movements movements. *Journal of Motor Behavior* 17, 1 (1985), 77–95. <https://doi.org/10.1080/00222895.1985.1073538> Publisher: Routledge.

[40] Meike Jipp, Essam Badreddin, Ciamak Abkai, and Jürgen Hesser. 2008. Individual Ability-based System Configuration Cognitive Profiling with Bayesian Networks. In *2008 IEEE International Conference on Systems, Man and Cybernetics*. IEEE, 3359–3364. <https://doi.org/10.1109/ICSMC.2008.4811816> ISSN: 1062-922X.

[41] Meike Jipp, Christian Bartolein, and Essameddin Badreddin. 2009. Predictive validity of wheelchair driving behavior for fine motor abilities: Definition of input variables for an adaptive wheelchair system. In *2009 IEEE International Conference on Systems, Man and Cybernetics*. IEEE, 39–44. <https://doi.org/10.1109/ICSMC.2009.5346347> ISSN: 1062-922X.

[42] Meike Jipp, Christian Bartolein, Essam Badreddin, Ciamak Abkai, and Jürgen Hesser. 2009. Psychomotor profiling with Bayesian networks. In *2009 IEEE International Conference on Systems, Man and Cybernetics*. IEEE, 1680–1685. <https://doi.org/10.1109/ICSMC.2009.5346795> ISSN: 1062-922X.

[43] Meike Jipp, Achim Wagner, and Essameddin Badreddin. 2008. Individual Ability-Based System Design of Dependable Human-Technology Interaction. *IFAC Proceedings Volumes* 41, 2 (Jan. 2008), 14779–14784. <https://doi.org/10.3182/20080706-5-KR-1001.02502>

[44] Daniel Johnson, John Clarkson, and Felicia Huppert. 2010. Capability measurement for Inclusive Design. *Journal of Engineering Design* 21, 2–3 (June 2010), 275–288. <https://doi.org/10.1080/09544820903303464>

[45] Simeon Keates, Faustina Hwang, Patrick Langdon, P. John Clarkson, and Peter Robinson. 2002. Cursor measures for motion-impaired computer users. In *Proceedings of the fifth international ACM conference on Assistive technologies (Assets '02)*. Association for Computing Machinery, New York, NY, USA, 135–142. <https://doi.org/10.1145/638249.638274>

[46] Marjorie Kellor. 1971. Hand strength and dexterity. *American Journal of Occupational Therapy* 25 (1971), 77–83.

[47] Heidi Horstmann Koester, Edmund F LoPresti, and Glen Ashlock. 2003. Compass: Software for Computer Skills Assessment. In *CSUN 2003 International Conference on Technology and Persons with Disabilities*. Los Angeles, CA, 3.

[48] Heidi Horstmann Koester, Edmund F. LoPresti, and Richard C. Simpson. 2006. Measurement Validity for Compass Assessment Software. In *Proceedings of the RESNA 29th Annual Conference*. RESNA Press, Arlington, VA.

[49] Heidi Horstmann Koester, Richard C. Simpson, D. M Spaeth, and Edmund F. LoPresti. 2007. Reliability and Validity of Compass Software for Access Assessment. In *Proceedings of the RESNA 30th Annual Conference*. RESNA, , VA. <https://www.resna.org/sites/default/files/legacy/conference/proceedings/2007/Research/CAC/Koester.html>

[50] George V. Kondraske. 1990. A PC-Based Performance Measurement Laboratory System. *Journal of Clinical Engineering* 15, 6 (Nov. 1990), 467–478. <https://doi.org/10.1097/00004669-199011000-00016>

[51] George V. Kondraske. 1990. Quantitative Measurement And Assessment Of Performance. In *Rehabilitation Engineering* (1 ed.), Raymond V. Smith and John H. Leslie (Eds.). Routledge, 101–125. <https://doi.org/10.1201/9780203741009-6>

[52] Junhan Kong, Mingyuan Zhong, James Fogarty, and Jacob O. Wobbrock. 2022. Quantifying Touch: New Metrics for Characterizing What Happens During a Touch. In *Proceedings of the 24th International ACM SIGACCESS Conference on Computers and Accessibility (ASSETS '22)*. Association for Computing Machinery, New York, NY, USA, 1–13. <https://doi.org/10.1145/3517428.3544804> event-place: Athens, Greece.

[53] Reality Labs. 2021. Inside Facebook Reality Labs: Wrist-based interaction for the next computing platform. <https://tech.facebook.com/reality-labs/2021/3/inside-facebook-reality-labs-wrist-based-interaction-for-the-next-computing-platform/>

[54] Ronald C. Lyle. 1981. A performance test for assessment of upper limb function in physical rehabilitation treatment and research. *International Journal of Rehabilitation Research* 4, 4 (Dec. 1981), 483. https://journals.lww.com/intjrehabilres/citation/1981/12000/a_performance_test_for_assessment_of_upper_limb.aspx?casa_token=HrUBN7FZL24AAAAA:MDgxXGNpkzX1uj_3sXN9IEIOJRri9L5_HlZ00SmzXiVwYDjLB9yzlvsCfD3DL2PRVHQJq7aUluRAvqZhq-spj0

[55] Kelly Mack, Emma J. McDonnell, Leah Findlater, and Heather D. Evans. 2022. Chronically Under-Addressed: Considerations for HCI Accessibility Practice with Chronically Ill People. In *Proceedings of the 24th International ACM SIGACCESS Conference on Computers and Accessibility (ASSETS '22)*. Association for Computing Machinery, New York, NY, USA, 1–15. <https://doi.org/10.1145/3517428.3544803>

[56] I. Scott MacKenzie. 1992. Fitts’ Law as a Research and Design Tool in Human-Computer Interaction. *Human-Computer Interaction* 7, 1 (1992), 91–139. https://doi.org/10.1207/S15327051HCI0701_3 Publisher: Lawrence Erlbaum Associates, Inc..

[57] I. Scott MacKenzie. 2002. A Note on Calculating Text Entry Speed. <http://www.yorku.ca/mack/RN-TextEntrySpeed.html>

[58] I. Scott MacKenzie and Poiku Isokoski. 2008. Fitts’ throughput and the speed-accuracy tradeoff. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI ’08)*. ACM, New York, NY, USA, 1633–1636. <https://doi.org/10.1145/1357054.1357308> ISBN: 9781605580111.

[59] I. Scott MacKenzie, Tatu Kauppinen, and Miika Silfverberg. 2001. Accuracy Measures for Evaluating Computer Pointing Devices. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*. ACM, New York, NY, USA, 9–16.

[60] I. Scott MacKenzie and R. William Soukoreff. 2002. A character-level error analysis technique for evaluating text entry methods. In *Proceedings of the second Nordic conference on Human-computer interaction (NordiCHI ’02)*. Association for Computing Machinery, New York, NY, USA, 243–246. <https://doi.org/10.1145/572020.572056>

[61] I. Scott MacKenzie and Shawn Xia Zhang. 1999. The design and evaluation of a high-performance soft keyboard. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*. ACM, 25–31. <https://doi.org/10.1145/302979.302983>

[62] Jennifer Mankoff, Gillian R. Hayes, and Devva Kasnitz. 2010. Disability studies as a source of critical inquiry for the field of assistive technology. In *Proceedings of the 12th international ACM SIGACCESS conference on Computers and accessibility - ASSETS ’10*. ACM Press, Orlando, Florida, USA, 3. <https://doi.org/10.1145/1878803.1878807>

[63] Alex Mariakakis, Sayna Parsi, Shwetak N. Patel, and Jacob O. Wobbrock. 2018. Drunk User Interfaces: Determining Blood Alcohol Level through Everyday Smartphone Tasks. In *Proceedings of the 2018 CHI Conference on Human Factors in Computing Systems*. ACM, Montreal QC Canada, 1–13. <https://doi.org/10.1145/3173574.3173808>

[64] Nicola Marsden and Maren Haag. 2016. Stereotypes and Politics: Reflections on Personas. In *Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems (CHI ’16)*. Association for Computing Machinery, New York, NY, USA, 4017–4031. <https://doi.org/10.1145/2858036.2858151>

[65] Virgil Mathiowetz, Nancy Kashman, Gloria Volland, Karen Weber, M. Dowd, and Sandra Rogers. 1985. Grip and pinch strength: normative data for adults. *Archives of Physical Medicine and Rehabilitation* 66, 2 (Feb. 1985), 69–74. <https://www.sciapse.io/papers/1586793705>

[66] Virgil Mathiowetz, Gloria Volland, Nancy Kashman, and Karen Weber. 1985. Adult Norms for the Box and Block Test of Manual Dexterity. *The American Journal of Occupational Therapy* 39, 6 (June 1985), 386–391. <https://doi.org/10.5014/ajot.39.6.386>

[67] Virgil Mathiowetz, Karen Weber, Nancy Kashman, and Gloria Volland. 1985. Adult Norms for the Nine Hole Peg Test of Finger Dexterity. *The Occupational Therapy Journal of Research* 5, 1 (Jan. 1985), 24–38. <https://doi.org/10.1177/153944928500500102> Publisher: SAGE Publications.

[68] Virgil Mathiowetz, Karen Weber, Gloria Volland, and Nancy Kashman. 1984. Reliability and validity of grip and pinch strength evaluations. *The Journal of Hand Surgery* 9, 2 (March 1984), 222–226. [https://doi.org/10.1016/S0363-5023\(84\)80146-X](https://doi.org/10.1016/S0363-5023(84)80146-X)

[69] Frederick M Jr Maynard, Michael B Bracken, Graham Creasey, John F Jr Dittunno, William H Donovan, Thomas B Ducker, Susan L Garber, Ralph J Marino, Samuel L Stover, Charles H Tator, Robert L Waters, Jack E Wilberger, and Wise Young. 1997. International Standards for Neurological and Functional Classification of Spinal Cord Injury. *Spinal Cord* 35 (1997), 266–274.

[70] Claire Mitchell, Gabriel Cler, Susan Fager, Paola Contessa, Serge Roy, Gianluca De Luca, Joshua Kline, and Jennifer Wojtech. 2022. Ability-Based Keyboards for Augmentative and Alternative Communication: Understanding How Individuals’ Movement Patterns Translate to More Efficient Keyboards: Methods to Generate Keyboards Tailored to User-Specific Motor Abilities. In *Extended Abstracts of the 2022 CHI Conference on Human Factors in Computing Systems (CHI EA ’22)*. ACM Press, New York, NY, USA, 1–7. <https://doi.org/10.1145/3491101.3519845> event-place: New Orleans, LA, USA.

[71] Claire L. Mitchell, Gabriel J. Cler, Susan K. Fager, Paola Contessa, Serge H. Roy, Gianluca De Luca, Joshua C. Kline, and Jennifer M. Wojtech. 2022. Ability-Based Methods for Personalized Keyboard Generation. *Multimodal Technologies and Interaction* 6, 8 (Aug. 2022), 67. <https://doi.org/10.3390/mti6080067>

[72] Terhi Mustonen, Maria Olkkonen, and Jukka Hakkinen. 2004. Examining mobile phone text legibility while walking. In *CHI ’04 Extended Abstracts on Human Factors in Computing Systems (CHI EA ’04)*. Association for Computing Machinery, New York, NY, USA, 1243–1246. <https://doi.org/10.1145/985921.986034>

[73] Amelie Nolte, Karolin Lueneburg, Dieter P. Wallach, and Nicole Jochems. 2022. Creating Personas for Signing User Populations: An Ability-Based Approach to User Modelling in HCI. In *Proceedings of the 24th International ACM SIGACCESS Conference on Computers and Accessibility (ASSETS ’22)*. Association for Computing Machinery, New York, NY, USA, 1–6. <https://doi.org/10.1145/3517428.3550364> event-place: Athens, Greece.

[74] Amelie Nolte, Jacob Wobbrock, Torben Volkmann, and Nicole Jochems. 2022. Implementing Ability-Based Design: A Systematic Approach to Conceptual User Modeling. *ACM Transactions on Accessible Computing* 15, 4 (Oct. 2022), 1–26. <https://doi.org/10.1145/3551646> Place: New York, NY, USA Publisher: Association for Computing Machinery.

[75] World Health Organization. 2001. *The International Classification of Functioning, Disability and Health: ICF*. WHO; Geneva, Switzerland. Technical Report. WHO, Geneva, Switzerland.

[76] Robert Palisano, Peter Rosenbaum, Stephen Walter, Dianne Russell, Ellen Wood, and Barbara Galuppi. 1997. Development and reliability of a system to classify gross motor function in children with cerebral palsy. *Developmental Medicine & Child Neurology* 39, 4 (1997), 214–223. <https://doi.org/10.1111/j.1469-8749.1997.tb07414.x> _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1111/j.1469-8749.1997.tb07414.x>

[77] Robert J Palisano, Peter Rosenbaum, Doreen Bartlett, and Michael H Livingston. 2008. Content validity of the expanded and revised Gross Motor Function Classification System. *Developmental Medicine & Child Neurology* 50, 10 (2008), 744–750. <https://doi.org/10.1111/j.1469-8749.2008.03089.x> _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1111/j.1469-8749.2008.03089.x>

[78] Andrea Paulson and Jilda Vargas-Adams. 2017. Overview of Four Functional Classification Systems Commonly Used in Cerebral Palsy. *Children* 4, 4 (April 2017), 30. <https://doi.org/10.3390/children4040030> Number: 4 Publisher: Multidisciplinary Digital Publishing Institute.

[79] Umesh Persad, Joy Goodman-Deane, Pat Langdon, and P. Clarkson. 2018. Exploring User Capability Data with Topological Data Analysis. In *Breaking Down Barriers: Usability, Accessibility and Inclusive Design*. Springer International Publishing, 41–50. https://doi.org/10.1007/978-3-319-75028-6_4

[80] Umesh Persad, Patrick Langdon, and John Clarkson. 2007. Characterising user capabilities to support inclusive design evaluation. *Universal Access in the Information Society* 6, 2 (Sept. 2007), 119–135. <https://doi.org/10.1007/s10209-007-0083-y>

[81] Daniele Piscitelli, Francesco Ferrarello, Alessandro Ugolini, Sofia Verola, and Leonardo Pellicciari. 2021. Measurement properties of the Gross Motor Function Classification System, Gross Motor Function Classification System-Expanded & Revised, Manual Ability Classification System, and Communication Function Classification System in cerebral palsy: a systematic review with meta-analysis. *Developmental medicine and child neurology* 63, 11 (Nov. 2021), 1251–1261. <https://doi.org/10.1111/dmcn.14910> Place: England.

[82] Thomas Platz, Cosima Pinkowski, Frederike van Wijck, In-Ha Kim, Paolo di Bella, and Garth Johnson. 2005. Reliability and validity of arm function assessment with standardized guidelines for the Fugl-Meyer Test, Action Research Arm Test and Box and Block Test: a multicentre study. *Clinical Rehabilitation* 19, 4 (June 2005), 404–411. <https://doi.org/10.1191/0269215505cr832oa> Publisher: SAGE Publications Ltd STM.

[83] Niall P. Quinn. 1998. Classification of fluctuations in patients with Parkinson’s disease. *Neurology* 51, 2 Suppl 2 (Aug. 1998), S25–S29. https://doi.org/10.1212/WNL.51.2_Suppl_2.S25 Publisher: Wolters Kluwer Health, Inc. on behalf of the American Academy of Neurology Section: Articles.

[84] Gisela Reyes-Cruz, Joel E. Fischer, and Stuart Reeves. 2020. Reframing Disability as Competency: Unpacking Everyday Technology Practices of People with Visual Impairments. In *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems*. ACM, Honolulu HI USA, 1–13. <https://doi.org/10.1145/3313831.3376767>

[85] Jebsem Robert H. 1969. An objective and standardized test of hand function. *Arch Phys Med Rehabil* 50 (1969), 311–319. <https://cir.nii.ac.jp/crid/1571980074962197376>

[86] Helen C. Roberts, Hayley J. Denison, Helen J. Martin, Harnish P. Patel, Holly Syddall, Cyrus Cooper, and Avan Aihie Sayer. 2011. A review of the measurement of grip strength in clinical and epidemiological studies: towards a standardised approach. *Age and Ageing* 40, 4 (July 2011), 423–429. <https://doi.org/10.1093/ageing/afr051>

[87] Rüdiger Rupp, Fin Biering-Sørensen, Stephen P. Burns, Daniel E. Graves, James Guest, Linda Jones, Mary Schmidt Read, Gianna M. Rodriguez, Christian Schulz, Keith E. Tansey-MD, Kristen Walden, and Steven Kirshblum. 2021. International Standards for Neurological Classification of Spinal Cord InjuryRevised 2019. *Topics in Spinal Cord Injury Rehabilitation* 27, 2 (March 2021), 1–22. <https://doi.org/10.46292/sci2702-1> Publisher: Allen Press.

[88] Anita Sant’Anna, Arash Salarian, and Nicholas Wickstrom. 2011. A new measure of movement symmetry in early Parkinson’s disease patients using symbolic processing of inertial sensor data. *IEEE Transactions on Biomedical Engineering* 58, 7 (July 2011), 2127–2135. <https://doi.org/10.1109/TBME.2011.2149521> Conference Name: IEEE Transactions on Biomedical Engineering.

[89] T Scott Saponas, Desney S. Tan, Dan Morris, and Ravin Balakrishnan. 2008. Demonstrating the feasibility of using forearm electromyography for muscle-computer interfaces. In *Proceedings of the SIGCHI Conference on Human Factors*

in *Computing Systems (CHI '08)*. Association for Computing Machinery, New York, NY, USA, 515–524. <https://doi.org/10.1145/1357054.1357138>

[90] Sayan Sarcar, Jussi Jokinen, Antti Oulasvirta, Xiangshi Ren, Chaklam Silpasuwanchai, and Zhenxin Wang. 2017. Ability-Based Optimization: Designing Smartphone Text Entry Interface for Older Adults. In *Human-Computer Interaction – INTERACT 2017 (Lecture Notes in Computer Science)*, Regina Bernhaupt, Girish Dalvi, Anirudha Joshi, Devanuj K. Balkrishnan, Jacki O'Neill, and Marco Winckler (Eds.). Springer International Publishing, Cham, 326–331. https://doi.org/10.1007/978-3-319-68059-0_22

[91] Sayan Sarcar, Jussi PP Jokinen, Antti Oulasvirta, Zhenxin Wang, Chaklam Silpasuwanchai Asian Institute of Technology, Asian Institute of Technology, and Xiangshi Ren. 2018. Ability-Based Optimization of Touchscreen Interactions. *IEEE Pervasive Computing* 17, 1 (2018), 15–26. www.computer.org/pervasive

[92] Sayan Sarcar, Jussi Jokinen, Antti Oulasvirta, Chaklam Silpasuwanchai, Zhenxin Wang, and Xiangshi Ren. 2016. Towards Ability-Based Optimization for Aging Users. In *Proceedings of the International Symposium on Interactive Technology and Ageing Populations (ITAP '16)*. Association for Computing Machinery, New York, NY, USA, 77–86. <https://doi.org/10.1145/2996267.2996275> event-place: Kochi, Japan.

[93] Adrian Sayers. 2007. Tips and tricks in performing a systematic review. *The British Journal of General Practice* 57, 542 (Sept. 2007), 759. <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC2151802/>

[94] Michael H. Schwartz and Adam Rozumalski. 2008. The gait deviation index: A new comprehensive index of gait pathology. *Gait & Posture* 28, 3 (Oct. 2008), 351–357. <https://doi.org/10.1016/j.gaitpost.2008.05.001>

[95] Andrew Sears, Min Lin, Julie Jacko, and Yan Xiao. 2003. When Computers Fade... Pervasive Computing and Situationally-Induced Impairments and Disabilities. In *Proceedings of the 10th International Conference on Human-Computer Interaction (HCI International '03)*. Lawrence Erlbaum Associates, Crete, Greece, 1298–1302.

[96] Andrew Sears and Mark Young. 2002. Physical disabilities and computing technologies: an analysis of impairments. In *The human-computer interaction handbook: fundamentals, evolving technologies and emerging applications*. L. Erlbaum Associates Inc., USA, 482–503.

[97] Ajay Seth, Jennifer L. Hicks, Thomas K. Uchida, Ayman Habib, Christopher L. Dembia, James J. Dunne, Carmichael F. Ong, Matthew S. DeMers, Apoorva Rajagopal, Matthew Millard, Samuel R. Hamner, Edith M. Arnold, Jennifer R. Yong, Shrinidhi K. Lakshminathan, Michael A. Sherman, Joy P. Ku, and Scott L. Delp. 2018. OpenSim: Simulating musculoskeletal dynamics and neuromuscular control to study human and animal movement. *PLOS Computational Biology* 14, 7 (July 2018), e1006223. <https://doi.org/10.1371/journal.pcbi.1006223> Publisher: Public Library of Science.

[98] Tom Shakespeare. 2016. The social model of disability. In *The Disability Studies Reader* (5th ed.). Vol. 2. Taylor & Francis, New York, NY, USA, 197–204. Google-Books-ID: aijQlDwAAQBAJ.

[99] C. Solaro, R. Di Giovanni, E. Grange, M. Mueller, M. Messmer Uccelli, R. Bertoni, G. Brichetto, A. Tacchino, F. Patti, A. Pappalardo, L. Prosperini, L. Castelli, R. Rosato, D. Cattaneo, and D. Marenco. 2020. Box and block test, hand grip strength and nine-hole peg test: correlations between three upper limb objective measures in multiple sclerosis. *European Journal of Neurology* 27, 12 (2020), 2523–2530. <https://doi.org/10.1111/ene.14427> _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1111/ene.14427>

[100] R. William Soukoreff and I. Scott MacKenzie. 2003. Metrics for text entry research: an evaluation of MSD and KSPC, and a new unified error metric. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '03)*. Association for Computing Machinery, New York, NY, USA, 113–120. <https://doi.org/10.1145/642611.642632>

[101] R. William Soukoreff and I. Scott MacKenzie. 2004. Recent developments in text-entry error rate measurement. In *CHI '04 Extended Abstracts on Human Factors in Computing Systems (CHI EA '04)*. Association for Computing Machinery, New York, NY, USA, 1425–1428. <https://doi.org/10.1145/985921.986081>

[102] R. William Soukoreff and I. Scott MacKenzie. 2004. Towards a standard for pointing device evaluation, perspectives on 27 years of Fitts' law research in HCI. *International Journal of Human-Computer Studies* 61, 6 (Dec. 2004), 751–789. <https://doi.org/10.1016/j.ijhcs.2004.09.001>

[103] Katherine M Steele, Adam Rozumalski, and Michael H Schwartz. 2015. Muscle synergies and complexity of neuromuscular control during gait in cerebral palsy. *Developmental Medicine & Child Neurology* 57, 12 (2015), 1176–1182. <https://doi.org/10.1111/dmcn.12826> _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1111/dmcn.12826>

[104] Matthew C. Tresch, Vincent C. K. Cheung, and Andrea d'Avella. 2006. Matrix Factorization Algorithms for the Identification of Muscle Synergies: Evaluation on Simulated and Experimental Data Sets. *Journal of Neurophysiology* 95, 4 (April 2006), 2199–2212. <https://doi.org/10.1152/jn.00222.2005> Publisher: American Physiological Society.

[105] Shari Trewin, Simeon Keates, and Karyn Moffatt. 2008. Individual responses to a method of cursor assistance. *Disability and Rehabilitation: Assistive Technology* 3, 1–2 (Jan. 2008), 2–21. <https://doi.org/10.1080/17483100701273128> Publisher: Taylor & Francis _eprint: <https://doi.org/10.1080/17483100701273128>

[106] Matthieu B. Trudeau, Tawan Udtamadilok, Amy K. Carlson, and Jack T. Dennerlein. 2011. Thumb Motor Performance Varies by Movement Orientation, Direction, and Device Size During Single-Handed Mobile Phone Use. *Human Factors: The Journal of the Human Factors and Ergonomics Society* 53, 1 (Dec. 2011), 52–59. <https://doi.org/10.1177/0018720811423660>

[107] Sean M. Tweedy, Emma M. Beckman, and Mark J. Connick. 2014. Paralympic Classification: Conceptual Basis, Current Methods, and Research Update. *PM&R* 6, 8S (2014), S11–S17. <https://doi.org/10.1016/j.pmrj.2014.04.013> _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1016/j.pmrj.2014.04.013>

[108] Sean M. Tweedy, Mark J. Connick, and Emma M. Beckman. 2018. Applying Scientific Principles to Enhance Paralympic Classification Now and in the Future. *Physical Medicine and Rehabilitation Clinics of North America* 29, 2 (May 2018), 313–332. <https://doi.org/10.1016/j.pmr.2018.01.010>

[109] S. M. Tweedy and Y. C. Vanlandewijck. 2011. International Paralympic Committee position stand—background and scientific principles of classification in Paralympic sport. *British Journal of Sports Medicine* 45, 4 (April 2011), 259–269. <https://doi.org/10.1136/bjsm.2009.065060> Publisher: British Association of Sport and Exercise Medicine Section: Reviews.

[110] Daniil Umanski and Yael Avni. 2017. PLAY-ABLE: Developing Ability-Based Play Activities for Children with Special Needs. In *Proceedings of the 11th International Convention on Rehabilitation Engineering and Assistive Technology (i-CREATE 17)*. Singapore Therapeutic, Assistive & Rehabilitative Technologies (START) Centre, Midview City, SGP.

[111] Gregg Vanderheiden, Jonathan Lazar, J. Jordan, Yao Ding, and Rachel Wood. 2020. Morphic: Auto-Personalization on a Global Scale. In *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems*. ACM, New York, NY, USA, 1–12. <https://doi.org/10.1145/3313831.3376204> Pages: 12.

[112] Gregg Vanderheiden and Jutta Treviranus. 2011. Creating a Global Public Inclusive Infrastructure. In *Universal Access in Human-Computer Interaction. Design for All and eInclusion (Lecture Notes in Computer Science)*, Constantine Stephanidis (Ed.). Springer, Berlin, Heidelberg, 517–526. https://doi.org/10.1007/978-3-642-21672-5_57

[113] Gregg C. Vanderheiden, Amrish Chourasia, Jim Tobias, and Steve Githens. 2014. The Library Gpii System. In *Universal Access in Human-Computer Interaction. Design for All and Accessibility Practice (Lecture Notes in Computer Science)*, Constantine Stephanidis and Margherita Antona (Eds.). Springer International Publishing, Cham, 494–505. https://doi.org/10.1007/978-3-319-07509-9_47

[114] Gregg C. Vanderheiden, Jutta Treviranus, and Amrish Chourasia. 2013. The global public inclusive infrastructure (Gpii). In *Proceedings of the 15th International ACM SIGACCESS Conference on Computers and Accessibility (ASSETS '13)*. Association for Computing Machinery, New York, NY, USA, 1–3. <https://doi.org/10.1145/2513383.2513395>

[115] Gregg C. Vanderheiden, Jutta Treviranus, Maria Gemou, Evangelos Bekiaris, Kasper Markus, Colin Clark, and Antranig Basman. 2013. The Evolving Global Public Inclusive Infrastructure (Gpii). In *Universal Access in Human-Computer Interaction. Design Methods, Tools, and Interaction Techniques for eInclusion (Lecture Notes in Computer Science)*, Constantine Stephanidis and Margherita Antona (Eds.). Springer, Berlin, Heidelberg, 107–116. https://doi.org/10.1007/978-3-642-39188-0_12

[116] Gregg C. Vanderheiden, Jutta Treviranus, Manuel Ortega-Moral, Matthias Peissner, and Eva de Lera. 2014. Creating a Global Public Inclusive Infrastructure (Gpii). In *Universal Access in Human-Computer Interaction. Design for All and Accessibility Practice (Lecture Notes in Computer Science)*, Constantine Stephanidis and Margherita Antona (Eds.). Springer International Publishing, Cham, 506–515. https://doi.org/10.1007/978-3-319-07509-9_48

[117] Gregg C. Vanderheiden, Jutta Treviranus, Jose A. Martinez Usero, Evangelos Bekiaris, Maria Gemou, and Amrish O. Chourasia. 2012. Auto-Personalization: Theory, Practice and Cross-Platform Implementation. *Proceedings of the Human Factors and Ergonomics Society Annual Meeting* 56, 1 (Sept. 2012), 926–930. <https://doi.org/10.1177/1071181312561193> Publisher: SAGE Publications Inc.

[118] Paul Whittington, Huseyin Dogan, Keith Phalp, and Nan Jiang. 2022. Detecting physical abilities through smartphone sensors: an assistive technology application. *Disability and Rehabilitation: Assistive Technology* 17, 8 (Nov. 2022), 974–985. <https://doi.org/10.1080/17483107.2020.1839135> Publisher: Taylor & Francis _eprint: <https://doi.org/10.1080/17483107.2020.1839135>

[119] Jacob O. Wobbrock. 2007. Measures of Text Entry Performance. In *Text entry systems: mobility, accessibility, universality*, I. Scott MacKenzie and Kumiko Tanaka-Ishii (Eds.). Boston : Morgan Kaufmann, Amsterdam. OCLC: ocm76167345.

[120] Jacob O. Wobbrock. 2014. Improving pointing in graphical user interfaces for people with motor impairments through ability-based design. In *Assistive technologies and computer access for motor disabilities*. IGI Global, 206–253. <https://www.igi-global.com/gateway/chapter/www.igi-global.com/gateway/chapter/78429>

[121] Jacob O. Wobbrock. 2019. Situationally Aware Mobile Devices for Overcoming Situational Impairments. In *Proceedings of the ACM SIGCHI Symposium on Engineering Interactive Computing Systems (EICS '19)*. Association for Computing Machinery, New York, NY, USA, 1–18. <https://doi.org/10.1145/3319499.3330292> event-place: Valencia, Spain.

[122] Jacob O. Wobbrock and Krzysztof Z. Gajos. 2007. A comparison of area pointing and goal crossing for people with and without motor impairments. In *Proceedings of the 9th international ACM SIGACCESS conference on Computers and accessibility (Assets '07)*. Association for Computing Machinery, New York, NY, USA, 3–10. <https://doi.org/10.1145/1296843.1296847>

[123] Jacob O. Wobbrock and Krzysztof Z. Gajos. 2008. Goal Crossing with Mice and Trackballs for People with Motor Impairments: Performance, Submovements, and Design Directions. *ACM Transactions on Accessible Computing* 1, 1 (May 2008), 4:1–4:37. <https://doi.org/10.1145/1361203.1361207>

[124] Jacob O. Wobbrock, Krzysztof Z. Gajos, Shaun K. Kane, and Gregg C. Vanderheiden. 2018. Ability-Based Design. *Commun. ACM* 61, 6 (May 2018), 62–71. <https://doi.org/10.1145/3148051>

[125] Jacob O. Wobbrock, Shaun K. Kane, Krzysztof Z. Gajos, Susumu Harada, and Jon Froehlich. 2011. Ability-based design: Concept, principles and examples. *ACM Transactions on Accessible Computing* 3, 3 (April 2011), 1–27. <https://doi.org/10.1145/1952383.1952384>

[126] Jacob O. Wobbrock, Kristen Shinohara, and Alex Jansen. 2011. The effects of task dimensionality, endpoint deviation, throughput calculation, and experiment design on pointing measures and models. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '11)*. Association for Computing Machinery, New York, NY, USA, 1639–1648. <https://doi.org/10.1145/1978942.1979181>

[127] Claes Wohlin. 2014. Guidelines for snowballing in systematic literature studies and a replication in software engineering. In *Proceedings of the 18th International Conference on Evaluation and Assessment in Software Engineering*. ACM, London England United Kingdom, 1–10. <https://doi.org/10.1145/2601248.2601268>

[128] Jonathan R. Wolpaw, Niels Birbaumer, Dennis J. McFarland, Gert Pfurtscheller, and Theresa M. Vaughan. 2002. Brain–computer interfaces for communication and control. *Clinical Neurophysiology* 113, 6 (June 2002), 767–791. [https://doi.org/10.1016/S1388-2457\(02\)00057-3](https://doi.org/10.1016/S1388-2457(02)00057-3) Publisher: Elsevier.

[129] Ellen Wood and Peter Rosenbaum. 2000. The Gross Motor Function Classification System for Cerebral Palsy: a study of reliability and stability over time. *Developmental Medicine & Child Neurology* 42, 5 (2000), 292–296. <https://doi.org/10.1111/j.1469-8749.2000.tb00093.x> _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1111/j.1469-8749.2000.tb00093.x>

[130] Momona Yamagami, Kelly Mack, Jennifer Mankoff, and Katherine M. Steele. 2022. “I’m Just Overwhelmed”: Investigating Physical Therapy Accessibility and Technology Interventions for People with Disabilities and/or Chronic Conditions. *ACM Transactions on Accessible Computing* 15, 4 (Oct. 2022), 35:1–35:22. <https://doi.org/10.1145/3563396>

[131] Nuray Yozbatiran, Lucy Der-Yeghaian, and Steven C. Cramer. 2008. A Standardized Approach to Performing the Action Research Arm Test. *Neurorehabilitation and Neural Repair* 22, 1 (Jan 2008), 78–90. <https://doi.org/10.1177/1545968307305353> Publisher: SAGE Publications Inc STM.

[132] Shumin Zhai. 2004. Characterizing computer input with Fitts’ law parameters—the information and non-information aspects of pointing. *International Journal of Human-Computer Studies* 61, 6 (Dec. 2004), 791–809. <https://doi.org/10.1016/j.ijhcs.2004.09.006>

[133] Shumin Zhai, Michael Hunter, and Barton A. Smith. 2002. Performance Optimization of Virtual Keyboards. *Human-Computer Interaction* 17, 2–3: Text Entry for Mobile Computing (2002), 229–269. <https://doi.org/10.1080/07370024.2002.9667315>

[134] Mingrui Ray Zhang and Jacob O. Wobbrock. 2019. Beyond the Input Stream: Making Text Entry Evaluations More Flexible with Transcription Sequences. In *Proceedings of the 32nd Annual ACM Symposium on User Interface Software and Technology (UIST '19)*. Association for Computing Machinery, New York, NY, USA, 831–842. <https://doi.org/10.1145/3332165.3347922>

[135] Mingrui Ray Zhang, Shumin Zhai, and Jacob O. Wobbrock. 2019. Text Entry Throughput: Towards Unifying Speed and Accuracy in a Single Performance Metric. In *Proceedings of the 2019 CHI Conference on Human Factors in Computing Systems (CHI '19)*. Association for Computing Machinery, New York, NY, USA, 1–13. <https://doi.org/10.1145/3290605.3300866>